

BEST AVAILABLE COPY


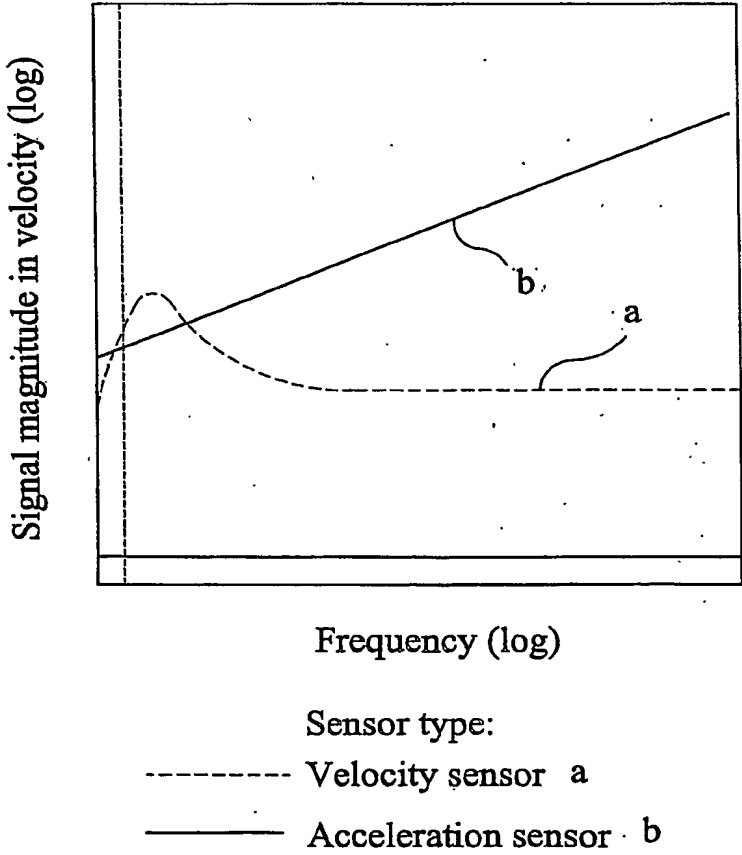


FIG 2

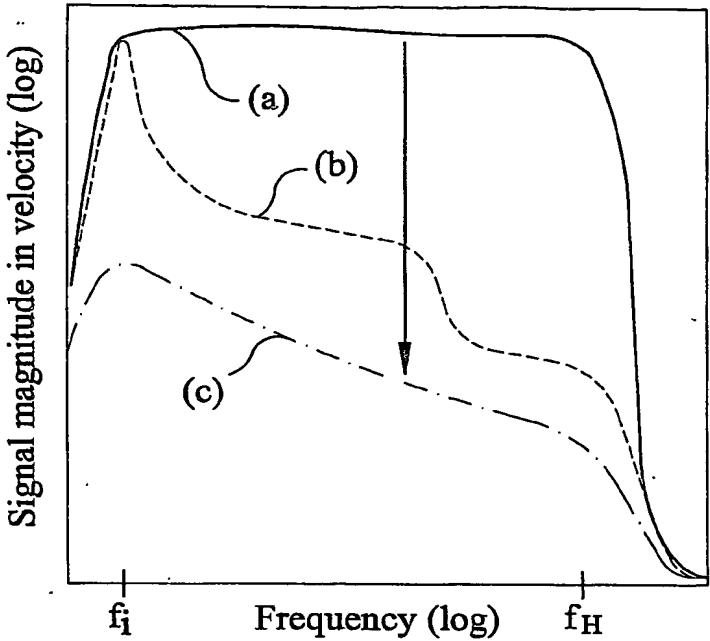


**FIG 3**

Source offset

Source signal (a)

Near offset receiver (b)

Far offset receiver (c)


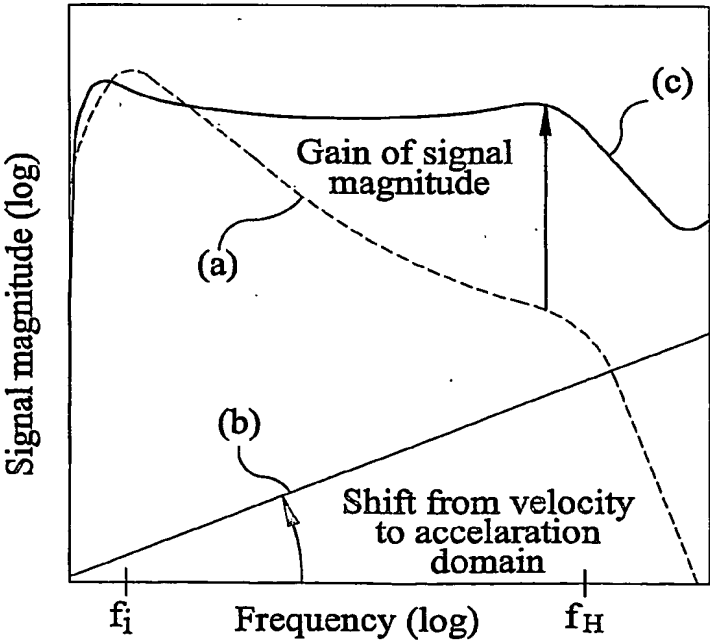


**FIG 4**



Signal domain:

Velocity domain (a)

Acceleration domain (b)

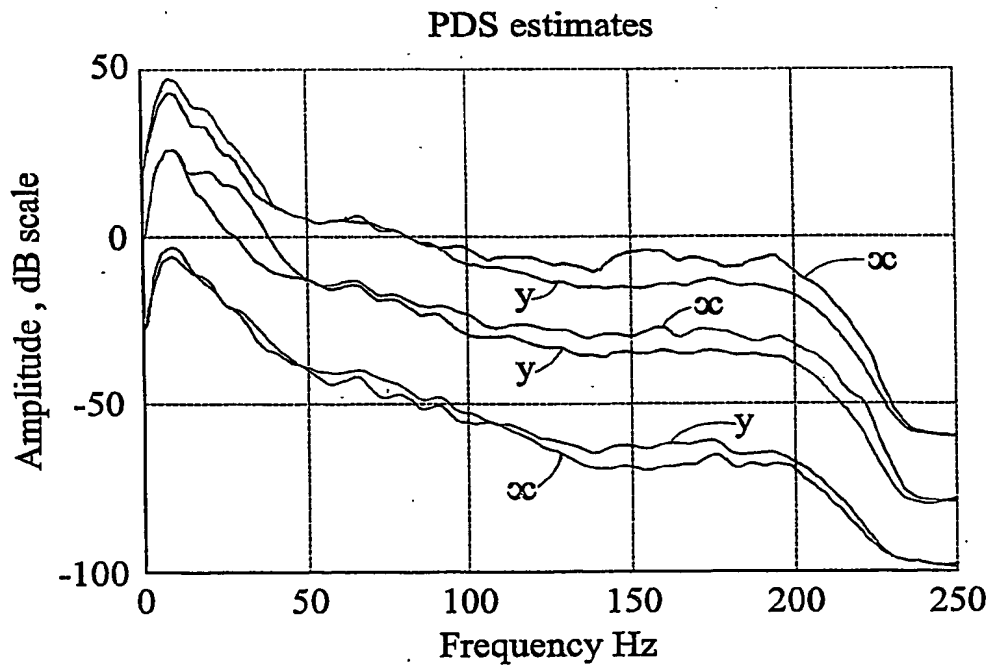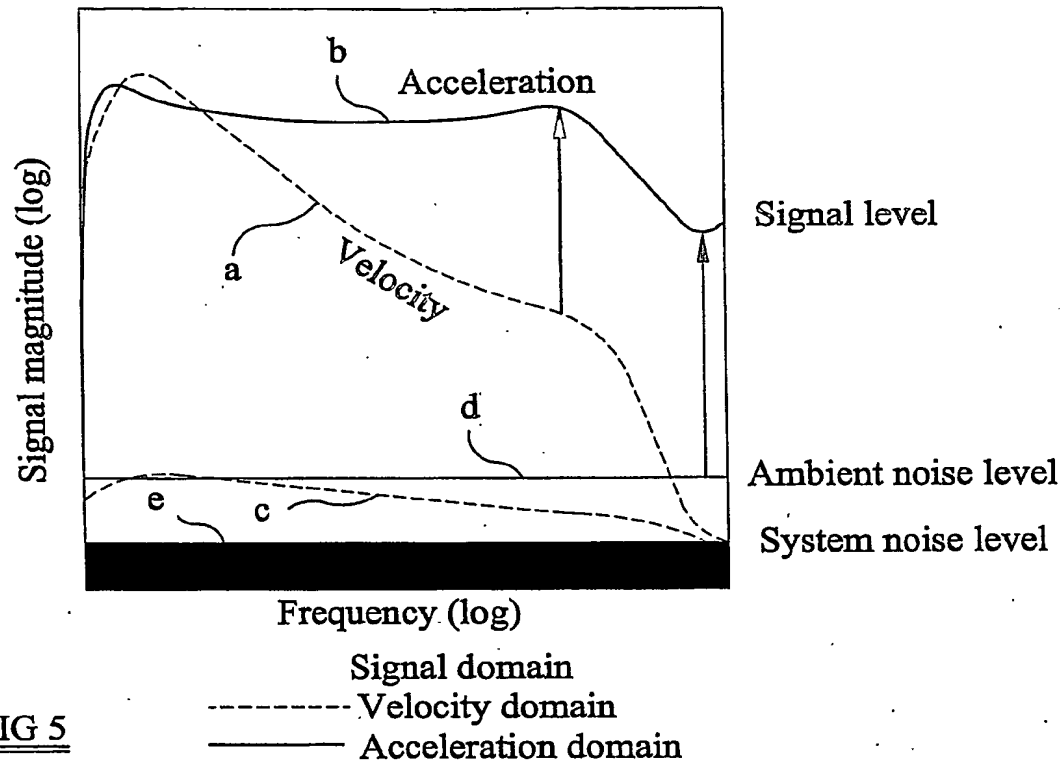

4 / 9

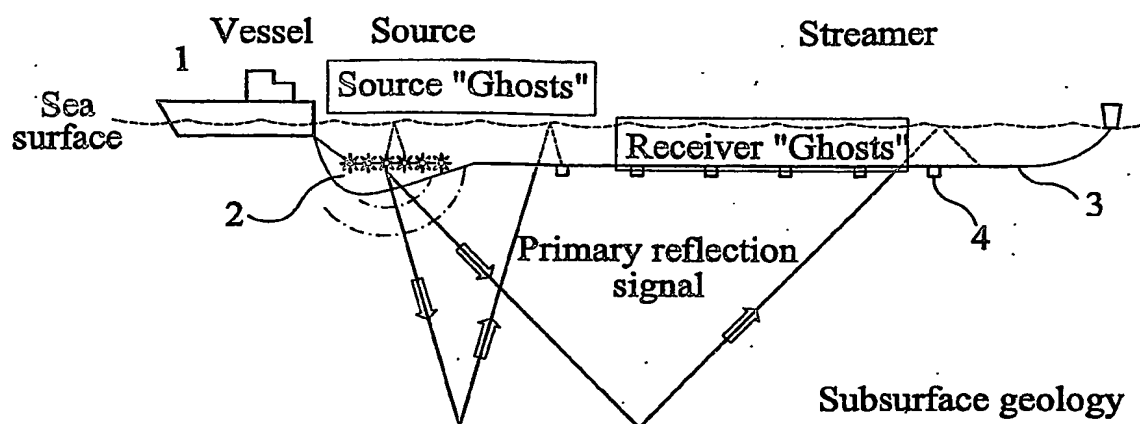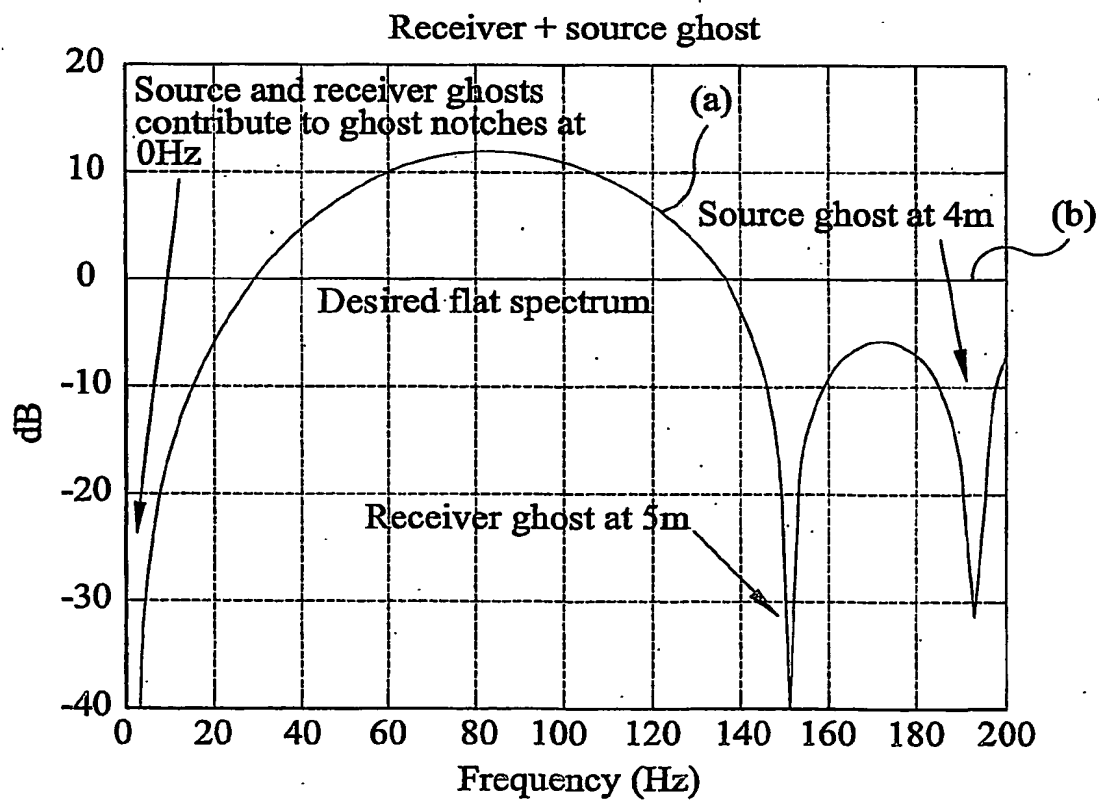FIG 7FIG 8

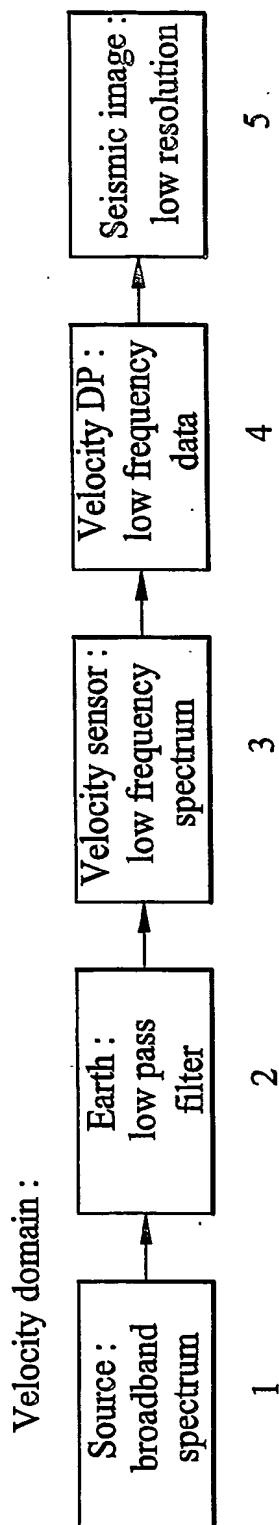


FIG 9(a)

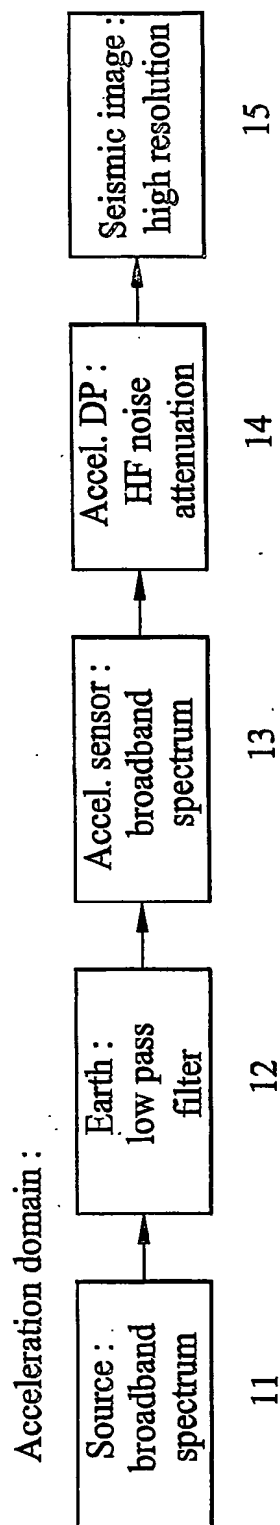
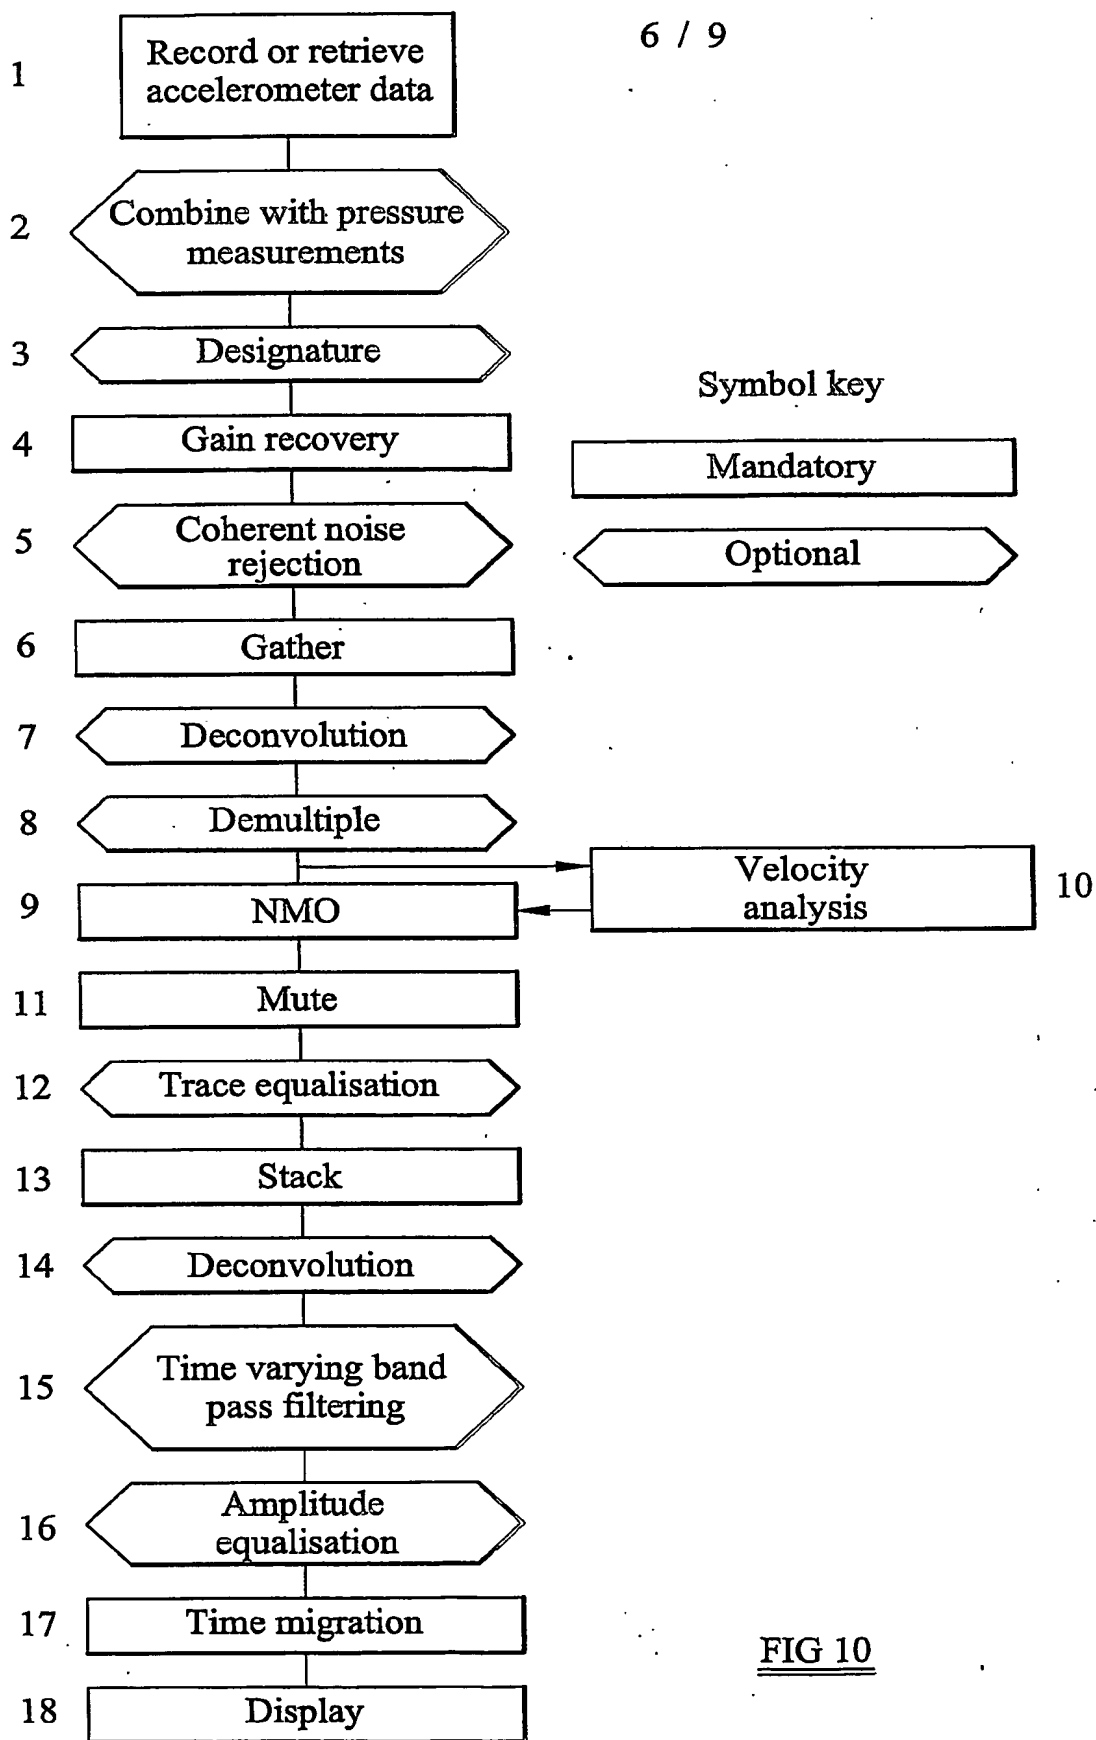
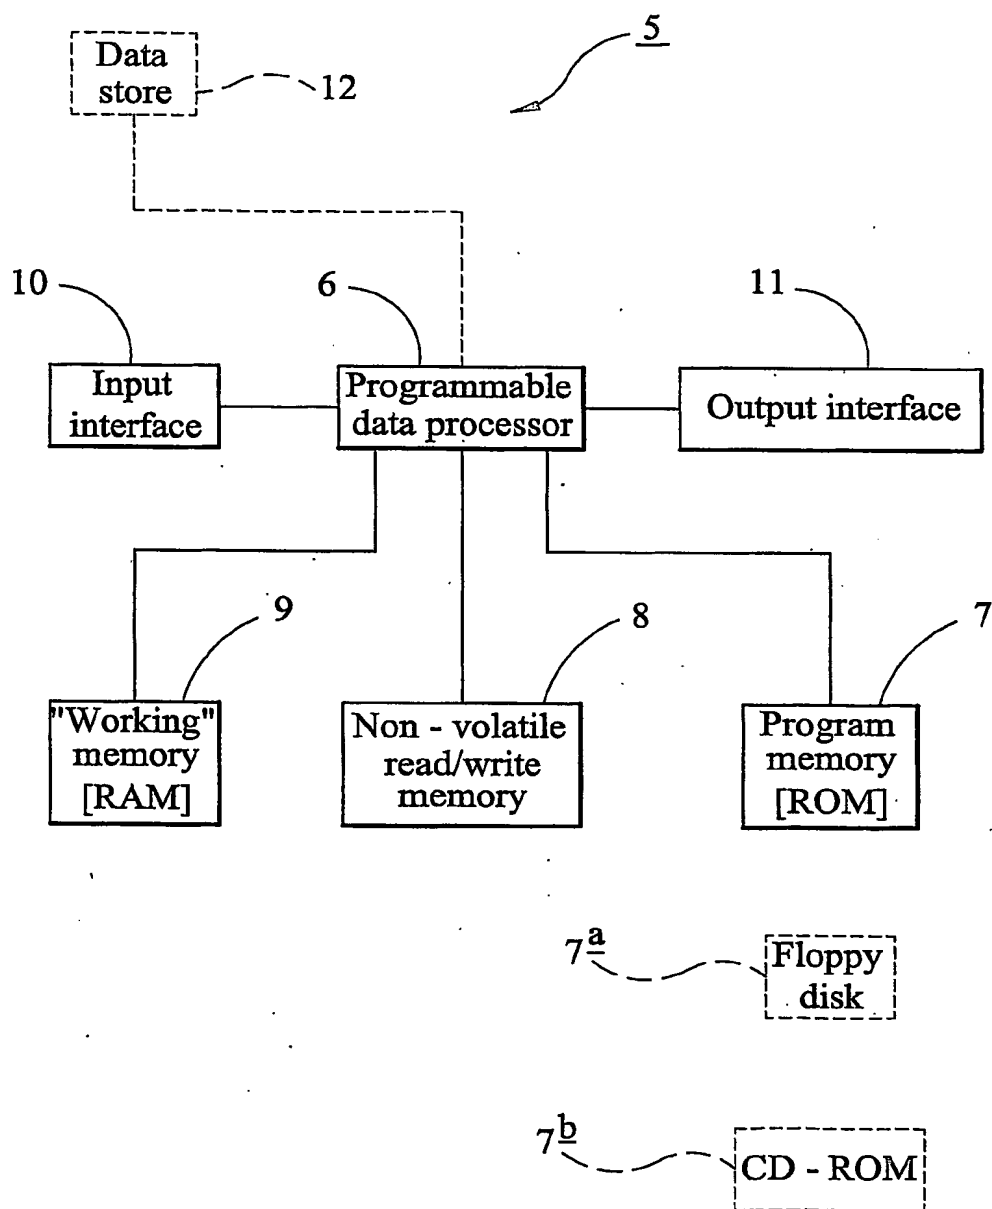


FIG 9(b)

6 / 9

FIG 10

7 / 9

FIG 11

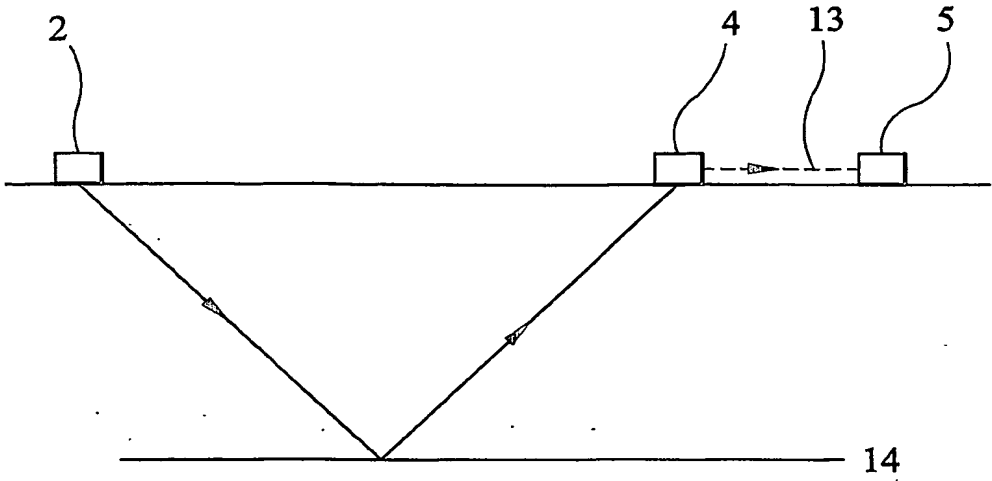


FIG 12<sup>(a)</sup>

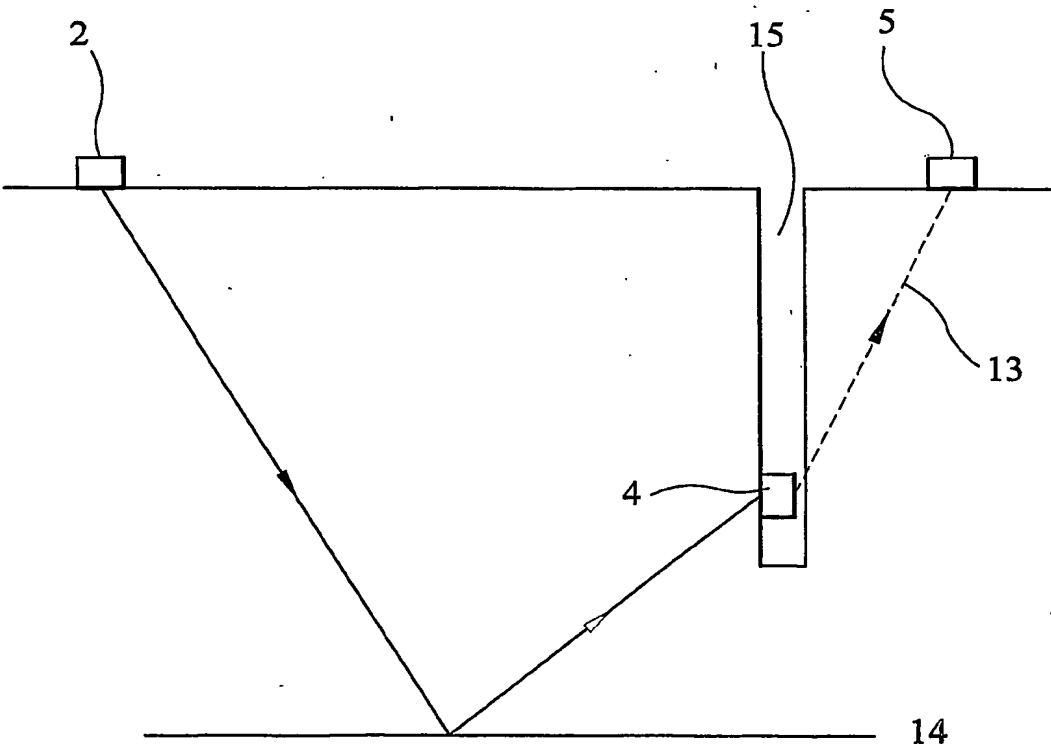


FIG 12<sup>(b)</sup>



9/9

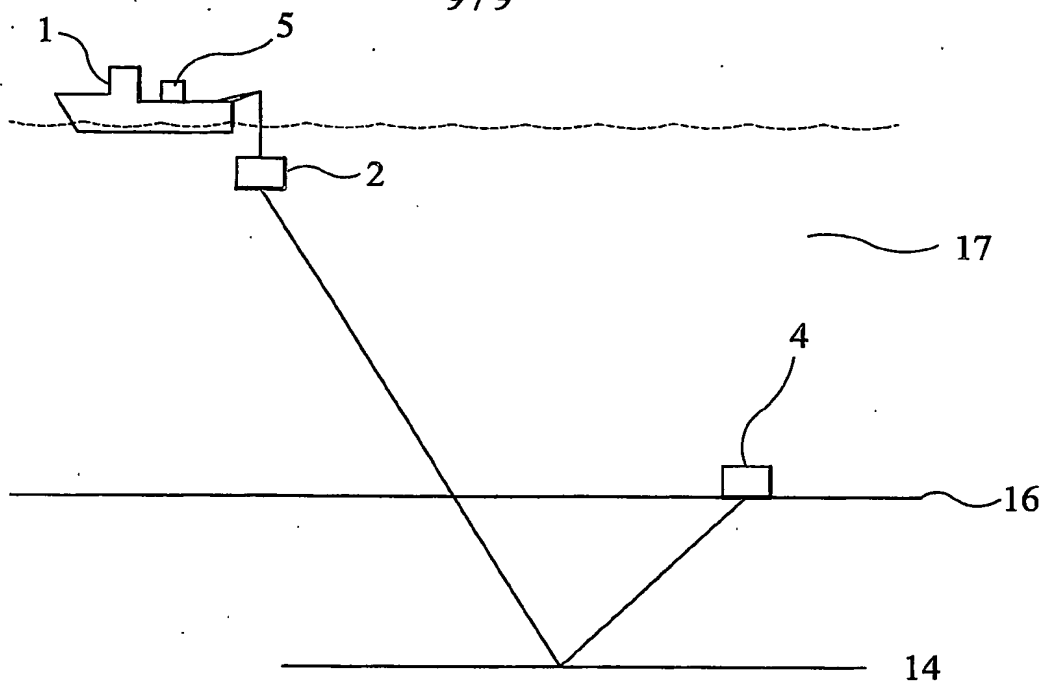


FIG 12 (c)

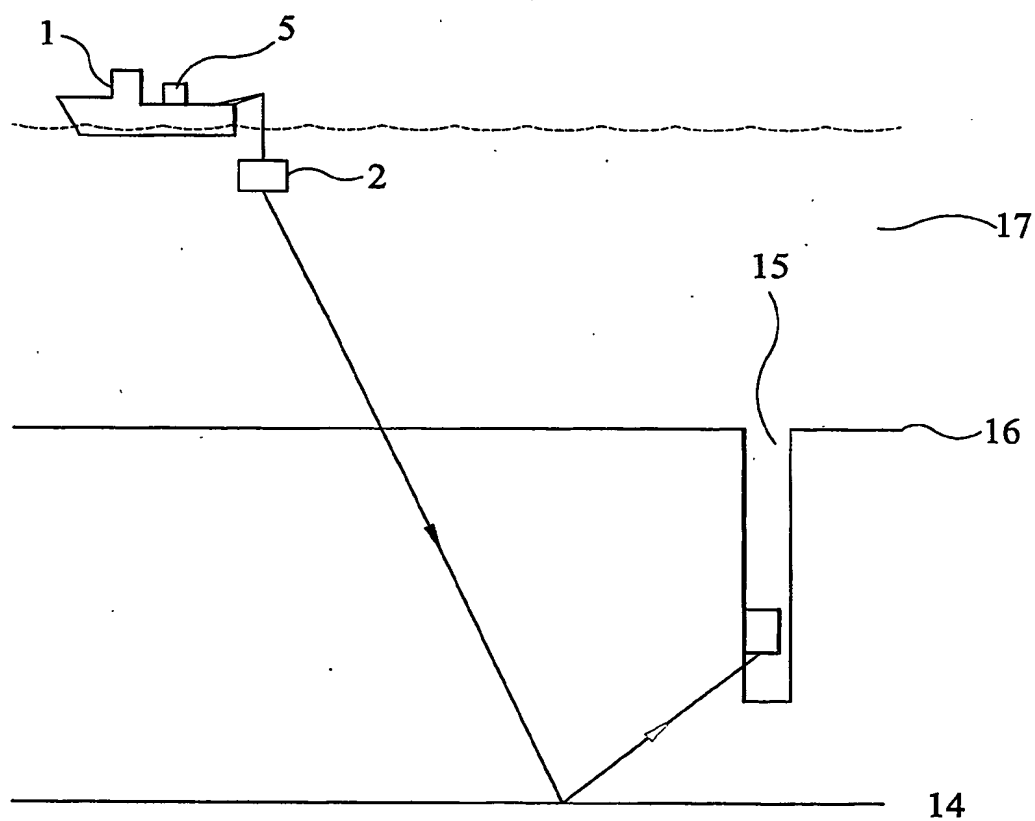


FIG 12 (d)